

04/25/00
Jc685 U.S. PTO

PATENT

4-26-00

ATTORNEY DOCKET NO. ACBI.028.01US

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of: Torleif Ove Bjornson

Serial No.: Not Yet Assigned

Filed: April 25, 2000

For: Multiple Array Microfluidic Device Units

) Examiner: Not Yet Assigned

) Art Unit: Not Yet Assigned

) UTILITY PATENT APPLICATION
) TRANSMITTAL

Jc135 U.S. PTO
09/557519
04/25/00

BOX PATENT APPLICATION

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

This is a request for filing a patent application under 37 C.F.R. § 1.53(b) in the name of inventor: **Torleif Ove Bjornson**

For: Multiple Array Microfluidic Device Units

This application is a [] Continuation [] Divisional [X] Continuation-in-part of prior Application No.: 09/153,814, filed September 15, 1998.

Application Elements:

26 Pages of Specification, Claims and Abstract

5 Sheets of Formal Drawings

CERTIFICATE OF EXPRESS MAILING

"Express Mail" Label No.: EK742369440US

Date of Deposit: 25 April, 2000

I hereby certify under 37 C.F.R. 1.10 that this correspondence is being deposited with the United States Postal Service as "Express Mail Post Office to Addressee" with sufficient postage on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C., 20231.

Jennifer Wahlsten
(Signature)
Jennifer Wahlsten
(Printed Name)

☒ Declaration

☒ Unexecuted Combined Inventor Declaration and Power of Attorney

☐ Copy from prior application (37 CFR 1.63(d) for a continuation or divisional).

The entire disclosure of the prior application from which a copy of the declaration is herein supplied is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

☐ Deletion of inventors Signed statement attached deleting inventor(s) named in the prior application, *see* CFR 1.63(d)(2) and 1.33(b).

Accompanying Application Parts:

☐ Assignment and Assignment Recordation Cover Sheet (recording fee of \$40.00 enclosed)

☐ Power of Attorney

☐ 37 CFR 3.73(b) Statement by Assignee

☐ Information Disclosure Statement with Form 1449

☐ Copies of IDS Citations

☐ Preliminary Amendment

☒ Return Receipt Postcard

☒ Small Entity Statement(s) ☒ Statement filed in prior application. Status still proper and desired.

☐ Other:

☐ A sequence listing.

☐ paper copy.

☐ computer readable copy.

☐ Statement in Compliance with Requirements for Patent Applications Containing Nucleotide and/or Amino Acid Sequence.

Claim For Foreign Priority

☐ Priority of _____ Application No. _____ filed on _____ is claimed under 35 U.S.C. § 119

☐ The certified copy has been filed in prior application U.S. Application No. _____

☐ the certified copy will follow.

Extension of Time for Prior Pending Application

☐ A Petition for Extension of Time is being concurrently filed in the prior pending application. A copy of the Petition for Extension of Time is attached.

Amendments

- ☐ Amend the specification by inserting before the first line the sentence: "This is a
☐ Continuation ☐ Continuation-in-part ☐ Divisional application of copending
prior
☐ Application No. _____ filed on _____.
☐ International Application _____ filed on _____, which
designated the United States, disclosure of which is incorporated herein by reference."
☐ Cancel in this application original claims _____ of the prior application before
calculating the filing fee

Fee Calculation (37 CFR § 1.16):

	(Col. 1)	(Col. 2)	<u>SMALL ENTITY</u>		<u>OTHER THAN A SMALL ENTITY</u>	
<u>FOR:</u>	<u>NO. FILED</u>	<u>NO. EXTRA</u>	<u>RATE</u>	<u>FEE</u>	<u>RATE</u>	<u>FEE</u>
Basic Fee			\$345	\$345	\$690	\$
Total Claims	8	0	\$ 9	\$	\$ 18	\$
Indep Claims	2	0	\$ 39	\$	\$ 78	\$
<input type="checkbox"/> Multiple Dependent Claims			\$130	\$	\$260	\$0
Total Filing Fee:						\$345

TOTAL FEES: \$345.00

- ☒ A check including the amount of the above-indicated TOTAL FEES is attached.
☐ Please charge Deposit Account No.18-0020 in the amount of \$ _____.
☐ No fee is required.
☒ Conditional Petition for Extension of Time: An extension of time is requested in the
present and/or the above-referenced parent application to provide for timely filing if an
extension of time is still required after all papers filed with this transmittal have been
considered.
☒ The Commissioner is hereby authorized to charge any underpayment of the following
fees associated with this communication, including any necessary fees for extension of
time, or credit any overpayment to Deposit Account No. 18-0020.

- ☒ Any filing fees under 37 CFR 1.16 including fees for the presentation of extra claims.
- ☒ Any parent application processing fees under 37 CFR 1.17.
- ☒ A **duplicate** copy of this sheet is attached for accounting purposes.

Respectfully submitted,

Dated: April 25, 2000

By: Bertram I. Rowland
Bertram I. Rowland, Ph.D.
Reg. No. 20,015 ~~Reg. No. 32,750~~

Rae-Venter Law Group, P.C.
P.O. Box 60039
Palo Alto, California 94306
Telephone: (650) 328-4400
Facsimile: (650) 328-4477

BIR/jsz
Enclosures

APPLICATION

FOR

UNITED STATES LETTERS PATENT

TITLE: MULTIPLE ARRAY MICROFLUIDIC DEVICE UNITS

INVENTORS: TORLEIF OVE BJORNSON

CERTIFICATE OF EXPRESS MAILING

"Express Mail" Label No.: EK 742369440US

Date of Deposit 25 April, 2000

I hereby certify under 37 C.F.R. 1.10 that this correspondence is being deposited with the United States Postal Service as "Express Mail Post Office to Addressee" with sufficient postage on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.

Jennifer Wahlsten
(Signature)

Jennifer Wahlsten
(Printed Name)

MULTIPLE ARRAY MICROFLUIDIC DEVICE UNITS

CROSS-REFERENCE TO RELATED APPLICATIONS

5 This application is a continuation-in-part of application serial no. 09/153,814, filed September 15, 1998, based on provisional application serial no. 60/059,333, filed September 19, 1997, now expired, which disclosures are incorporated herein by reference.

INTRODUCTION

Technical Field

The field of this invention is microfluidic device arrays.

Background

15 The advent of nanotechnology has found application in miniaturizing devices and methodologies. This reduction in size provides advantages in reducing the amount of reagents and samples required, ease of manipulation, speed and simplicity of equipment. In addition, by using electokinesis, one can perform separations, relate mobility to specific entities, perform mobility shifts, etc. These advantages have opened
20 opportunities in genetic analysis, high throughput screening for drug discovery, performing chemical operations, as well as other manipulations.

 In many instances there is an interest in simultaneous or parallel operations involving a plurality of events, where there is a common aspect to some or all of the events. For example, in high throughput drug screening, there may be a common reagent,
25 such as an enzyme, surface membrane protein or cell, which would be used to determine activity of the candidate compounds. By having the evaluations run simultaneously in the same environment, a more accurate comparison may be made of the results. One may be reassured that the evaluation has been performed under substantially the same conditions with the same reagent or sample, where all of the operations are carried out in
30 parallel.

It is, therefore, of interest to provide devices that afford opportunities to perform operations in parallel, with simultaneous and/or consecutive additions of operation components. Preferably, such devices would allow for performing the operation under substantially identical conditions. Also, such devices would have enhanced value by
5 being capable of being integrated with other devices that are presently available and find use in operations that are in part displaced by the use of microfluidic devices.

Relevant Literature

U.S. Patents of interest include 4,952,266; 4,965,049; 5,030,418; 5,104,621;
10 5,356,525; 5,589,330; and 5,658,413. U.S. Patent no. 5,324,401 describes a multiplexed capillary electrophoresis system. U.S. Patent no. 5,332,480 describes a multiple capillary electrophoresis device. U.S. Patent no. 5,277,780 describes a two dimensional electrophoresis apparatus. U.S. Patent no. 5, 413,686 describes a multi-channel automated capillary electrophoresis analyzer. U.S. Patent no. 5,4439,578 describes a
15 multiple capillary biochemical analyzer based on an array of separation capillaries terminating in a sheath flow cuvette. U.S. Patent no. 5,338,427 describes a single use capillary cartridge having electrically conductive films as electrodes. U.S. Patent nos. 5,091,652 and 4,675,300 describe means for detecting samples in a capillary. U.S. Patent no. 5,356,525 describes a device for presentation of a tray of 7 vials of sample to an array
20 of 7 capillaries for the sample injection process. U.S. Patent nos. 5,043,215; 4,927,604; 5,108,704; and 5,219,528 describe multi-well devices with integral membranes. U.S. Patent no. 4,925,629; 4,626,509; 5,213,776 and 5,525,302 describe multi-channel metering devices. A multi-well plate is described in PCT WO 97/15394. See also, WO 99/24827. Articles of interest include Wooley and Mathies, Proc. Natl. Acad. Sci. USA
25 91, 11348-11352 (1994) and Wooley, et al., Anal. Chem. 69, 2181-2186 (1997)

SUMMARY OF THE INVENTION

Microfluidic devices are provided comprising an array of repetitive sample receiving and processing units in a single substrate. Each repetitive unit comprises
30 microstructures of reservoirs and interconnected channels and is adapted for integration with microfluidic fluid flow control and detectors, whereby operations of mixing,

separation, reaction, and detection may be performed. A main channel in which a primary operation is performed will normally be repeated in each unit being uniformly spaced apart in two directions. The arrays are primarily designed for use in conjunction with other devices having regular arrays, such as microtiter well plates.

5

DESCRIPTION OF THE SPECIFIC EMBODIMENTS

In accordance with the subject invention microfluidic devices are provided, which can be used as part of an assembly comprising integral first and second plates, where the second plate is a microfluidic array for performing microfluidic operations and can be
10 used with a first plate which comprises an array of sample receiving elements for receiving and/or dispensing a plurality of samples from an array of sample containers. The second plate may be integral to the first plate comprising an array of sample wells. Operations can be performed by transferring at least a portion of the solutions from each of the sample wells, simultaneously or consecutively or combination thereof, to the
15 microfluidic network, where the wells and network are coordinated to provide for accuracy of recording of the events. Of particular interest is the use of electrokinesis, more particularly electrophoresis, for moving fluids and carrying out operations, although other methods for moving fluids in a microfluidic network can find use. For convenience, kits can be provided containing the microfluidic array and reagents, which
20 may be separate or be present in the microstructures of the individual units. The arrays of sample wells and microfluidic units provides for simultaneous or parallel operations for liquid transfer of at least aliquots from the individual wells.

In carrying out operations one can provide an integrated apparatus which may
25 include components to perform all or some of the following steps: means for transferring aliquots of liquids from sample containers, e.g. wells; means for initial processing of the array of aliquots to provide an array of processed aliquots; transfer means for transferring the processed aliquots to an array of capillary electrophoretic units; means for simultaneously conducting capillary electrophoresis in the capillary electrophoretic array;
30 and means for analyzing the content of the capillary electrophoretic array at a detection site.

Methodologies which may be employed involve simultaneous transfer of liquid moieties from an array of sample wells of a multiwell plate to an array of sample receiving elements, where at least a portion of each of the liquid moieties is then transferred simultaneously to a corresponding array of sample handling wells. At least a portion of each of these transferred liquid moieties is then expelled from the sample receiving elements by application of a motivating force, such as an electric field or pressure. The microfluidic networks can be in integral fluid communication with the sample receiving elements so that the expelled liquid is directed to a corresponding microstructure of a microfluidic unit.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a perspective view of one embodiment of one embodiment of an apparatus in accordance with the present invention.

Fig. 2 is an exploded view of the apparatus of Fig. 1.

Fig. 3 is a cross-sectional view of the apparatus of Fig. 1 taken along lines 3-3.

Fig. 4 is a perspective view of an embodiment of a microfluidic network.

Fig. 5 is a perspective view of one embodiment of a portion of a plate having a plurality of microfluidic networks.

Fig. 6 is a perspective view of another embodiment of a portion of a plate having a plurality of microfluidic networks.

Fig. 7 is a perspective view of another embodiment of a portion of a plate having a plurality of microfluidic networks.

Fig. 8 is a plan schematic view of dual 8 x 12 array of microfluidic units for sample injection and separation; and

Fig. 9 is a plan schematic view of an array for sample injection and component separation.

DESCRIPTION OF THE SPECIFIC EMBODIMENTS

The present invention encompasses methods and apparatus comprising a planar array of microfluidic networks of interconnected cavity structures and channels of

capillary dimensions for simultaneously conducting a plurality of microfluidic processes. The miniaturized system of enrichment trenches, reaction chambers and detection zones enable multiple laboratory processes to be integrated “on-board” a planar substrate, including sample preparation, incubation, electrophoretic separations and analyses. The subject plates allow for integration with other devices for simultaneous sampling of an array of samples, simultaneous handling of the samples and presenting an array of samples for electrophoresis, simultaneous transferring of the array of presented samples to an array of microfluidic capillary networks, and simultaneous conducting of processing of the samples in the microfluidic network.

The individual microfluidic networks comprise a plurality of reservoirs, two or more, generally not more than about 8, usually not more than about 6, where the reservoirs will have volumes ranging from about 0.01 to 100 μ l, more typically 0.1 to 10 μ l. Once drawn from the reservoir, sample volumes or their equivalent transported through the micro channels range from 1pl(picoliter) to 1000nl (nanoliters), more typically 10 to 1000pl. Volumes of sample drawn for individual microinjected reaction or separation plugs are 0.01pl to 10nl, more typically 0.1pl to 0.1nl.

Many of these advantages may be achieved in a variety of assays including immunoassays, DNA binding assays including total DNA determinations and DNA hybridizations, receptor-ligand competitive binding assays including whole cell assays, and the like. The capability to add a common reagent to multiple samples in, for example, a 96-well or a multi-well plate, mix and react the samples and reagents in the sample containers means that a primary reaction step (e.g. displacement of a common ligand to a receptor) can be done in discrete small volumes, in parallel with precise timing, with a minimum of carry-over and cross contamination, and without contamination of the starting material (e.g. any array or library of compounds). Simultaneous transfer may be carried out with respect to all of the wells in a multiwell plate or only with respect to some of the wells thereof. For example, one may wish to transfer samples with respect to only 8 or 16 or some other number of wells in a 96 well plate. Such transfer may be achieved by employing means for independently activating the transfer device to provide simultaneous transfer for fewer than the full number of wells in a multi-well plate.

For the purposes of this invention, an “array” intends an arrangement of a plurality of elements such as a plurality of wells in a multiwell source plate, a plurality of apertures or nozzles in a sample transfer plate, a plurality of microfluidic networks on the multi-assay card, and so forth. “Planar array” intends an array that is arranged in a plane,
5 which may be the plane of an object such as, for example, a planar substrate, comprising the array.

“Cavity structure” intends an unfilled space within a mass, preferably a hollowed out space in an object, such as, e.g. a planar substrate, a plate or the like in accordance with the present invention, such as, for example, a well, a reservoir, an incubation
10 chamber, a separation chamber, an enrichment chamber, a detection chamber, and the like. The cavity structures are usually present at one or both of the termini, i.e., either end, of a channel. The cavity structures may serve a variety of purposes, such as, for example, means for introducing a buffer solution, elution solvent, reagent rinse and wash solutions, etc. into the main channel or one or more interconnected auxiliary channels,
15 receiving waste fluid from the main channel, and the like. Also, the cavity structures may serve for electrode connections, sources or sinks of ions or charged sample species, or as the site for application of pressure or reduction of pressure.

“Channels” intends a conduit or means of communication, usually fluid communication, more particularly, liquid communication, between elements of the
20 present apparatus. The elements in communication are, e.g. cavity structures, etc. Channels include capillaries, grooves, trenches, microflumes, etc. The channels may be straight, curved, serpentine, labyrinth-like or other convenient structure within the planar substrate. The cross-sectional shape of the channel may be circular, ellipsoid, square, rectangular, triangular, etc. The inside of the channel may be coated with a material for
25 strength, for enhancing or reducing electrokinetic flow, such as polymers that are charged (electroosmotic flow) or uncharged (electrophoretic flow) or modified chemically or physically, such as electrical discharge, ozonization, chemical reactions with active agents which neutralize or add charges to the surface, etc., for enhancing detection limits and sensitivity, etc. Exemplary coatings include silylation, polyacrylamide (vinyl bound)
30 methylcellulose, polyether, polyvinylpyrrolidone, polyethylene glycol, polypropylene, Teflon®, Nafion®, polycarbonate, polydimethylsiloxane, polynorbornene, etc. The

coating may be coated on by any convenient way and when appropriate, particularly with water-soluble coatings, grafted onto the channel surface. (These coatings may also find application for the base material of the plate and/or cover, including penetration of the surface of the base material.)

5 “Capillary dimension “ intends a cross-sectional area that provides for capillary flow, wherein at least one dimension (width, height, diameter) is at least about 1 μ m, usually at least about 10 μ m and not greater than about 500 μ m, usually not greater than about 200 μ m. Channels will generally have an inside bore diameter (ID) of from about 1 to 200 μ m, usually about 25 to 100 μ m.

10 “Well plate” intends a plate comprising an array of wells, which may have any number of wells greater than one, usually in a regular pattern, generally having a number of wells which is a multiple of 8, such as 96, 192, 384 or 1536 well plates, exemplified by microtiter well plates.

 The subject devices may be used for electrokinetic flow, electroosmotic,
15 electrophoretic, dielectrophoretic, etc. or other movement generating means, including applications of magnetic fields, centrifugal force, thermal gradients, pneumatic means, both reduced and elevated pressures, etc. Depending upon the nature of the electrokinetic flow, with electroosmosis there will be movement of primarily fluid as the solute carrier, but also some movement as a result of the ionic movement of the solute in relation to the
20 electric field. In electrophoretic movement, the flow will be primarily ions, with minor fluid movement.

 In carrying out the methods of this invention samples may be processed or pretreated by any number of procedures, such as separations, sample enrichment, isolation or purification, analysis, e.g. assay, detection, etc., chemical synthesis, e.g.
25 combinatorial chemistry, polynucleotide synthesis or sequencing, oligopeptide synthesis, etc. Samples may be separated into fractions and the fractions guided to appropriate sites in a channel, where specific binding pair members, e.g. antigen-antibodies, complementary labeled components, chemically reactive components, etc., may be present. Cells, bacterial or mammalian, or viruses may be sorted by microfluidic
30 networks in conjunction with electrical fields and then analyzed. Cell fractionation can be achieved using phase extraction materials, including paramagnetic beads, non-

magnetic particles, etc., to bind with the cells such that the bead-cell complex can be separated from the other cells. Cell lysis results in releasing the intracellular materials for further analysis.

The microfluidic units provide for fluid handling, transport and manipulation within chambers and channels of capillary dimensions. Valveless sample injection is achieved by moving fluid and/or charged species from the reagent reservoirs into cross-channel injection zones, where plugs of components are precisely metered and dispensed into a desired flowpath. The rate and timing of movement of the fluids and ions in the various microchannels comprising the flowpath can be controlled by electrokinetic, magnetic, pneumatic and /or thermal-gradient driven transport, among others, as appropriate. These sample manipulation methods enable the profile and volume of the fluid plug to be controlled over a range of sizes with high reproducibility. In addition, microfluidic processing may include sample preparation and isolation where enrichment microchannels containing separation media are employed for target capture and purification. Microfluidic processing may also include reagent mixing, reaction/incubation, separations, sample detection and analyses.

The arrays will usually comprise individual units that are repeated in an organized manner. That is, each unit is the same as the other units and is spaced apart equally from surrounding units. Each of the components of the units is substantially the same as the other units and will be parallel, so as to have the same spacing and configuration as the other units. That is, the reservoirs and channels will be spaced in the same manner, have the same lengths, cross-sections and volumes in each of the units. Rather than sharing a common electrode, reservoir or channel, each of units will usually act independently, so as to have independent sample reservoirs, sites for electrodes, waste reservoirs and channels connecting reservoirs.

In one embodiment, the configuration of the units conforms to the spacing format of the wells in a well plate. Conveniently, a transfer device comprising a plurality of dispenser units is employed, where the organization of the spacing and positioning of the dispenser units allows for withdrawal of liquids from a storage device, e.g. the first plate, and dispensing of the liquids into reservoirs of the second plate, without reorienting the dispensing units. The microfluidic units comprising the capillaries may be constructed

by any number of means. In many instances the capillaries will be sufficiently hydrophilic to draw in several microliters of liquid aqueous sample by capillary action, although means of moving the fluid may be used, such as pneumatic pressure. A suitable capillary can be constructed from glass or silica tubing of appropriate dimensions.

5 Instead of an inorganic plate or substrate, plastic material may be used for the plate or substrate, such as polyethylene, polypropylene, polycarbonate, polysulfone, polymethylmethacrylate, polynorbornene, etc. If desired, in the case of hydrophobic plastics, the inner bore of the plastic capillary may be treated, as is well known and previously described, to make the inner walls of the capillary sufficiently hydrophilic to
10 draw in the sample by capillary action. In many cases, the capillary will first be filled with a buffer solution and the sample added to the device at an orifice, such as the opening to a reservoir. The sample components may then be transported into the capillary by any of the means described above.

In addition to those treatments described previously, appropriate treatments for
15 altering the hydrophobic surface of the plastic and imparting hydrophilicity to the inner walls of the capillaries include coating the walls with a surfactant or wetting agent, grafting a layer of hydrophilic polymer onto the wall of the hydrophobic capillary or treating the walls of the capillary by plasma etching.

In one embodiment, in Fig. 1, sample receiving elements 102 are sipper
20 capillaries as disclosed in U.S. Patent No. 5,560,811, at column 9, line 53, to column 10, line 45, the disclosure of which is incorporated herein by reference. In this approach first plate 100 has an array of sample receiving elements that comprise sample handling wells with a corresponding array of sipper capillaries. The array of sipper capillaries is aligned with wells of a multiwell plate containing the samples. When the sipper capillaries are
25 in the sample, an aliquot of sample is transferred to the sipper capillary by wicking action. The samples in the capillaries can be manipulated to be presented to the microfluidic networks in second plate 110.

In this embodiment, in Fig. 3, first plate 100 may also comprise a matrix element
104, which is typically made of a wide variety of porous matrix materials. For most
30 applications, the porous matrix materials should have little or no affinity for sample. Useful porous matrix materials include membrane materials such as regenerated

cellulose, cellulose acetate, polysulfone, polyvinylidene fluoride, polycarbonate and the like. For DNA samples, a cellulose acetate membrane such as that available from Amicon is useful. For protein samples, a membrane composed of polysulfone such as those available from Amicon or Gelman is useful.

5 Alternatively, porous matrix 104 could be a porous cylindrical or spherical plug of sintered polymer particles. Such porous materials are available from Porex or Interflow and are typically comprised of a bed of small polymeric particles that have been fused together by heat and pressure (sintering) to form a porous plug of predefined geometry. In another implementation, porous matrix 104 may comprise an ultrafiltration
10 membrane with a defined molecular weight cut off. Alternatively, porous matrix 104 could be derivatized with some biochemical agent to impart a selective binding capability to matrix 104.

 The apparatus shown in Figs. 1-3 also comprises a second plate 110 that is integral with the first plate. Second plate 110 comprises a planar array of microfluidic
15 networks 108 having interconnected cavity structures 142 and channels 120 and 124 (see Fig. 4). Each of the microfluidic networks corresponds to a respective sample-receiving element 102. In the embodiment shown in Figs 1-3, the capillaries are adapted for fluid communication with cavity structure 142. Liquid is transferred from sample receiving element 102 to cavity structure 142 by, for example, application of negative pressure,
20 thermal gradient and the like. The capillary may have a fritted element disposed therein such that capillary flow will continue until the fritted element is saturated whereupon capillary draw ceases. Transfer of the liquid can then be effected such as described above.

 The liquid receiving reservoirs of the microfluidic units for receiving samples or
25 reagents from an array of wells, will be spaced in relation to each other in the same spacing array as the source wells from which the liquid is transferred, generally spaced based on the centers of the wells. In this way, liquid can be moved from one plate to the next, where the liquid can be dispensed in the same pattern that it was withdrawn from the source.

30 In an embodiment wherein sample receiving elements 102 are sipper capillaries in accordance with U.S. Patent No. 5,560,811, the apparatus also includes a means of fluid

communication between plates 100 and 110. Such means of fluid communication includes, for example, a capillary between the two plates to provide for flow from the sample receiving well to the microfluidic networks of second plate 110. The capillary may extend from the sample receiving well to a cavity structure of the corresponding microfluidic network. The means of fluid communication may also be an opening in a cover plate for the second plate 100 where the opening permits liquid from the sample receiving well to be transferred mechanically, electrically, including electrostatically, and piezoelectrically, or the like into a corresponding microfluidic network of second plate 110.

The microfluidic network has interconnected cavity structures and channels, the latter forming one or more flowpaths resulting in an interconnected system. In general, there is a main flowpath and at least one, frequently more secondary flowpaths. A desired microfluidic process may be carried out in the main flowpath or in one of the secondary flowpaths. The additional flowpaths may be employed for a variety of purposes such as, for example, enrichment of a sample, isolation, purification, dilution, mixing, metering, and the like. A variety of configurations are possible, such as a branched configuration in which a plurality of flowpaths is in fluid communication with the main flowpath. See, for example, U.S. Patent No. 5,126,022.

The main flowpath has associated with it at least one pair of electrodes for applying an electric field to the medium present in the flowpath. Where a single pair of electrodes is employed, typically one member of the pair is present at each end of the pathway. Where convenient, a plurality of electrodes may be associated with the flowpath, as described in U.S. Patent No. 5,126,022, the relevant disclosure of which is herein incorporated by reference, where the plurality of electrodes can provide for precise movement of entities along the flowpath. The electrodes employed in the subject invention may be any convenient type capable of applying an appropriate electric field to the medium present in the flowpath with which they are associated.

An example of a basic configuration of a microfluidic network is shown in Fig. 4. Plate 110 is comprised of a plurality of microfluidic networks 108. Each network comprises main flowpath 120 and secondary flowpath 122, which intersect at 124. Electrode 130 is connected to reservoir 132 and electrode 134 is connected to reservoir

136. An electric potential can be applied to flowpath 122 by means of electrodes 130 and 134. Electrode 140 is connected to sample introduction port and reservoir 142 and electrode 144 is connected to waste reservoir 146. An electric potential can be applied to main flowpath 120 by means of electrodes 140 and 144. The main flowpath 120 has
5 optional portion 150 that is tortuous to provide an appropriate path length and residence time to achieve mixing by diffusion, incubation, and so forth.

Secondary flowpath 122 has detection zone 148 where the result of a microfluidic process may be detected. For example, if the microfluidic process is an assay for an analyte, the detection zone permits the detection of a signal produced during the assay.

10 Alternatively, if the microfluidic process is a chemical synthesis, the detection zone may be used to detect the presence of the synthesized compound. It is, of course, within the purview of the present invention to utilize several detection zones depending on the nature of the microfluidic process. There may be any number of detection zones associated with a single channel or with the multiple channels. (Any convenient and
15 sufficiently sensitive mode of detection may be employed, such as radioactivity, electrochemical, chemiluminescence, fluorescence, etc. However, since fluorescence is commonly used and will therefore be used as illustrative of methods of detection.)

Suitable detectors for use in the detection zones include, by way of example, photomultiplier tubes, photodiodes, photodiode arrays, avalanche photodiodes, linear and
20 array charge coupled device (CCD) chips, CCD camera modules, spectrophotometers, spectrofluorometers, and the like. Excitation sources include, for example, filtered lamps, LED's, laser diodes, gas, liquid and solid state lasers, and so forth. The detection may be laser scanned excitation, CCD camera detection, coaxial fiber optics, confocal back or forward fluorescence detection in single or array configurations, and the like.

25 Detection may be by any of the known methods associated with the analysis of capillary electrophoresis columns including the methods shown in U.S. Patent Nos. 5,560,811 (column 11, lines 19-30), 4,475,300 and 5,324,401, the relevant disclosures of which are incorporated herein by reference. An example of an optical system for reading the channels in the detection zones comprises a power supply, which energizes a
30 photomultiplier tube. A power supply energizes a 75 watt Xenon lamp. Light from the lamp is condensed by focusing lens, which passes light to an excitation filter. A dichroic

mirror directs excitation light to a microscope. The apparatus is mounted on a movable carriage so that light passes over the channels. Fluorescent emission light is collected by the microscope, passed through a dichroic mirror, emission filter, or spatial filter before reaching the photomultiplier (PMT). The output signal of PMT is fed to an analog-to-
5 digital converter, which in turn is connected to computer.

Alternatively, a static detection system in which a stationary detection point some distance from the injection end of the capillary is monitored as bands to be analyzed traverse the length of the capillary and pass by the detection zone could be used. This type of detection could be implemented using optical fibers and lenses to deliver the
10 excitation radiation to the capillary and to collect the fluorescent emission radiation from the detection zone in the capillary. Appropriate multiplexing and demultiplexing protocols might be used to sequentially irradiate and monitor a large array of capillaries using a single source and a single or a small number of photodetectors. Using this approach, each capillary in the array is sequentially polled to detect any analyte band in
15 the detection zone of that capillary.

The detectors may be part of an instrument into which the present apparatus is inserted. The instrument may be the same instrument that comprises the electrode leads and other components necessary for utilizing the present apparatus. However, separate instruments may be used for housing a sample container plate, incubation of sample and
20 reagents, detection of a result, electrical field application, and other operations such as temperature and humidity control, and so forth. Humidity control may be achieved in a number of ways such as, for example, the use of humidistats, water vapor sources confined in the device in fluid communication with other areas thereof, and so forth. Other methods of humidity control will be evident to those skilled in the art.

25 Generally, prior to using a microfluidic network, a suitable electroflow medium as described above is introduced into the flowpaths defined by the channels in the second or microfluidic plate. The medium may be conveniently introduced through one of the reservoirs at the termini of each of the channels.

The use of a microfluidic network is next discussed with reference to Fig. 4.
30 Sample is introduced into sample introduction port and reservoir 142 together with appropriate reagents for carrying out a microfluidic process. An electric potential is

applied across electrodes 140 and 144 causing medium containing the sample and other reagents to move through flowpath 120 and, in particular, portion 150 and 120. Mixing of sample and reagents, as well as incubation, take place in portion 150. When the portion of the medium containing the sample and reagents reaches intersection 124, the electric potential applied between electrodes 140 and 144 is discontinued and an electric potential is applied between electrodes 130 and 134. The point at which the sample and other reagents reach intersection 124 may be determined by detecting the presence of the sample or one of the reagents directly or by empirically determining the time at which the sample and reagents should reach the intersection 124, based on the particular nature of the sample, the medium employed, the strength of the electric potential and so forth. Application of the electrical potential to electrodes 130 and 134 causes a plug of medium of precise amount (determined by the dimensions of the channel) to move along secondary flowpath 122 towards reservoir 136 and through detection zone 148 where detection is conducted. This is the basic manner in which an exemplary microfluidic network operates. Of course, as will be appreciated by one of ordinary skill in the art, the precise manner of operation of microfluidic networks in an apparatus in accordance with the present invention is dependent on the construction of the apparatus.

Considerations include, for example, whether reagents are present on board the apparatus or added from a source outside the apparatus. Other considerations include manipulation of beads or magnetic beads in the channels, filling of channels with buffer, manipulation of discrete drops within otherwise unfilled channels, method of fluid movement (electroosmotic, electrokinetic, surface tension, centrifugal, pneumatic), mixing two or more reagents, incubation, and so forth.

Those skilled in the electrophoresis arts will recognize a wide range of electric potentials or field strengths may be used, for example, fields of 10 to 1000 V/cm are used with 200-600 V/cm being more typical. The upper voltage limit for commercial systems is 30 kV, with a capillary length of 40-60 cm, giving a maximum field of about 600 V/cm. There are reports of very high field strengths (2500 – 5000 V/cm) with short, small bore (10 microns) capillaries micro machined into an insulating substrate. Normal polarity is to have the injection end of the capillary at a positive potential. The electroosmotic flow is normally toward the cathode. Hence, with normal polarity all

positive ions and many negative ions will run away from the injection end. Generally, the “end capillary” detector will be near the cathode.

The polarity may be reversed for strongly negative ions so that they run against the electroosmotic flow. For DNA, typically the capillary is coated to reduce electroosmotic flow, and the injection end of the capillary is maintained at a negative potential.

Examples of devices that are suitable for the second plate in the above-integrated apparatus are provided in Figs. 5-7. Only a portion of the microfluidic network plates is shown in Figs. 5-7. It is to be understood that the microfluidic network plates may have any number of separate networks including more than or less than 96. The number of microfluidic networks may be multiples of 96 where the number is greater than 96 or multiples of 8 where the number is less than 96. In addition, some of the features of the microfluidic networks are not shown in all of the networks depicted in Fig. 5-7.

In Fig. 5 a portion of a plate 210 is shown where the plate may have up to ninety-six (96) microfluidic networks 208. Each network comprises main flowpath 220 and secondary flowpath 222, which intersect at 224. Electrode 230 is connected to reservoir 232 and electrode 234 is connected to reservoir 236. An electric potential can be applied to secondary flow path 222 by means of electrodes 230 and 234. Electrode 234 is connected to sample introduction port and reservoir 236 and electrode 230 is connected to reservoir 232. An electric potential can be applied between electrodes 230 and 234, so that sample ions are moved past the intersection between main flowpath 220 and secondary flowpath 222. An electric potential can then be applied to main flowpath 220 by means of electrodes 240 and 244, whereby sample ions move from the intersection into the main flowpath 220. The main flowpath 220 has a portion 250 that is in the form of a linear reciprocating coil to provide a tortuous path.

In Fig. 6 a portion of a plate 310 is shown where the plate may have up to ninety-six (96) microfluidic networks 308. Each network comprises main flowpath 320 and secondary flowpath 322, which intersect at 324. Electrode 330 is connected to reservoir 332 and electrode 334 is connected to reservoir 336. An electric potential can be applied to secondary flow path 322 by means of electrodes 330 and 334. Electrode 334 is connected to sample introduction port and reservoir 336 and electrode 330 is connected

to reservoir 332. As described above, the sample ions can be moved by a voltage gradient created by electrodes 330 and 334 to move the sample ions to the intersection 324 of the flowpaths 322 and 320. An electric potential can be applied to main flowpath 320 by means of electrodes 340 and 344 to move the sample ions into the main flowpath 320 for further processing. The main flowpath 320 is a circular coil to provide a tortuous path.

In Fig. 7 a portion of a plate 410 is shown where the plate may have up to ninety-six (96) microfluidic networks 408. Each network comprises main flowpath 420 and secondary flowpath 422, which intersect at 424. Electrode 430 is connected to reservoir 432 and electrode 434 is connected to reservoir 436. An electric potential can be applied to secondary flowpath 422 by means of electrodes 430 and 434. Electrode 430 is connected to sample introduction port and reservoir 432 and electrode 434 is connected to reservoir 436. An electric potential can be applied to secondary flowpath 422 by means of electrodes 430 and 434 and to main flowpath 420 by means of electrodes 440 and 444. The main flowpath 420 has a portion 450 that is in the form of a linear reciprocating coil to provide a tortuous path. The microfluidic networks of the plate of Fig. 6 also comprise a set of reagent reservoirs 452, 454, 456 and 458. Each of the reagent reservoirs has a channel providing communication between the reagent reservoir and each of the main flowpaths of the microfluidic networks. Accordingly, reagent reservoir 452 has a channel 470 that intersects main flowpaths 420 at 460 for each of the microfluidic networks in row 462 of plate 410. Likewise, reagent reservoir 454 has a channel 472 that intersects main flowpath 420 at 464 for each of the microfluidic networks in row 464 of plate 410. The same situation exists for reagent reservoirs 456 and 458. Reagents are moved through channels 470 and 472 by means of application of electrical potential at electrodes 480 and 482, respectively. By appropriate alternation of electric potential in channels 470 and 472 on the one hand and main channel 420 on the other, precise amounts of reagents can be metered into main flowpath 420.

With regard to electrodes, some or all of the electrodes may be within the second or microfluidic plate, with external connections to power supplies that may be part of an instrument into which the present apparatus is inserted. On the other hand, some or all of the electrodes might be on a separate part (e.g. built into an instrument into which the

present apparatus is inserted), such that the electrodes can be immersed into the appropriate fluid reservoirs at the time of use. In this approach the electrodes in the separate instrument may be adapted to make contact with an appropriate lead from each of the reservoirs forming a part of the microfluidic networks in the subject apparatus.

- 5 The electrodes may be strip metal electrodes formed in a stamping process or chemical etching process. The electrodes may be wires or strips either soldered or glued with epoxy and can be made of conductive materials such as platinum, gold, carbon fibers and the like. The electrodes could be deposited, coated or plated onto a section of the exterior wall of a capillary near each end of the capillary. Controlled vapor deposition of gold,
- 10 platinum or palladium metal onto the exterior wall of the capillary is one method of forming the electrodes. This technique can be used to produce an electrode layer with a thickness up to several microns. Thicker electrodes could be subsequently formed by electrochemically plating gold, palladium or platinum onto the thin electrode formed by the vapor deposition process. Electrodes could be integral with the second plate formed
- 15 by silk screening process, printing, vapor position, electrode-less plating process, etc. Carbon paste, conductive ink, and the like could be used to form the electrode.

Regardless of the embodiment of the present invention that is constructed, it is preferable for the electrodes to be connected to an electronic computer. The computer has programmed software dedicated to providing the moving waves or voltage profile

20 along the channel. Various different types of software can be provided so as to obtain the best possible results in the particular microfluidic processing conducted.

It is also within the purview of the present invention that the computer software that is connected to the electrodes be made interactive with an optical detection device such as ultraviolet or fluorescence spectrometer. The spectrometer can be focused singly

25 or at various points along the medium in the channels. As the ultraviolet spectrometer reads different types of substances being moved to different portions of the medium, the information can be sent to the computer, which can adjust the speed of the waves or voltage distribution profiles being generated in order to more precisely fine tune the resolution of the substances being moved through the medium.

30 As mentioned above, the channels can be in any shape. More specifically the channels can be fashioned so that it has a plurality of branches. Each of the branches

along with the channel itself can be filled with a desired medium. Various reagents may be moved along the branches by utilizing the moving electric wave generated by the computer. Accordingly, a sophisticated computer program may be utilized to provide for various protocols for microfluidic processing such as chemical synthesis, sequencing of
5 polynucleotides.

The integrated apparatus of the present invention may have any convenient configuration capable of comprising the first and second plates and their respective component parts. The cavities and channels of the second plate are usually present on the surface of a planar substrate where the substrate will usually, though not necessarily be
10 covered with a cover plate to seal the microfluidic networks present on the surface of the planar substrate from the environment. The cover plate will have appropriate communication means for establishing communication between each of the sample receiving elements of the first plate and the corresponding microfluidic network of the second plate. Such means include, for example, through-holes, capillaries, porous wicks
15 and the like. The apparatus may have a variety of configurations such as, for example, rectangular, circular, or other convenient configuration. Generally, apparatus in accordance with the present invention are of a size that is readily handled and manipulated. In general, a rectangular apparatus has dimensions of about 3 inches by 5 inches; a circular apparatus has a diameter of about 4 to 16 inches; and each would have a
20 thickness of at least about 0.2 inches, usually about 0.60 to 1.5 inches (including all of the elements of the apparatus). It should be obvious that the size of the present devices and apparatus is not critical and is in general a function of the particular multiwell plate with which the present device may be used.

The apparatus may be fabricated from a wide variety of materials, including glass,
25 silica, quartz, ceramics and polymers, including elastomeric material, thermosets and thermoplastics, e.g., acrylics, and the like. The various components of the apparatus may be fabricated from the same or different materials, depending on a number of factors such as, e.g., the particular use of the device, the economic concerns, solvent compatibility, optical clarity, color, mechanical strength, dielectric properties, e.g., dielectric strength
30 greater than 100 V/cm, and so forth. For example, the planar substrate of the second plate may be fabricated from the same material as the cover plate, e.g.,

polymethylmethacrylate, or from different materials such as, e.g., polymethylacrylate for the substrate and glass for the cover plate. Likewise, the first plate may be fabricated from the same material as the second plate, or one of the components of the second plate, e.g., glass bottom, glass top; plastic bottom, plastic cover, or from different materials
5 such as, e.g., glass for the first plate and plastic for the second plate.

For applications where it is desired to have a disposable integrated device, due to ease of manufacture and cost of materials, the device typically is fabricated from a plastic. For ease of detection and fabrication, the entire apparatus may be fabricated from a plastic material that is optically transparent, which generally allows light of
10 wavelengths ranging from 180 to 1500 nm, usually 220 to 800 nm, more usually 450 to 700 nm, to have low transmission losses. Suitable materials include fused silica, plastics, quartz, glass, and so forth.

Also of interest as materials suitable for fabrication of one or more components of the present apparatus are plastics having low surface charge under conditions or
15 electroflow. Particular plastics finding use include polymethyl methacrylate, polymethyl acrylate, polycarbonate, polyethylene terephthalate, polystyrene or styrene copolymers, polyesters, polynorbornene, and the like.

The apparatus may be fabricated using any convenient means, including conventional molding and casting techniques, extrusion sheet forming, calendaring,
20 embossing, thermoforming, and the like. For example, with apparatus prepared from plastic materials, a silicon mold master, which is the negative for the network structure in the planar substrate of the second plate, can be prepared by etching or laser micromachining. In addition to having a raised ridge that forms the channel in the substrate, the silicon mold may have a raised area that provides for one or more cavity
25 structures in the planar substrate. Next, a polymer precursor formulation can be thermally cured or photopolymerized between the silica master and support planar plate, such as a glass plate. Where convenient, the procedures described in U.S. Patent No. 5,110,514, the relevant disclosure of which is incorporated by reference, may be employed. After the planar substrate has been fabricated, electrodes may be introduced
30 where desired.

For the second plate cavity structures or reservoirs may be formed by boring holes only part way through the substrate at the ends of the channels, so that the cavity structures are not open on the opposite surface of the second plate. Holes can be bored or cut through the cover and aligned with the cavity structures. Liquids can be added to cavity structures formed in this manner, which can be filled through holes in the cover, rather than from the opposite side.

The substrate for the second plate may take a variety of shapes such as, for example, disk-like, card-like, and may be a layered or laminated sandwich structure. The substrate for the second plate is usually about 1 μm thick, usually at least about 5 μm , and more usually at least about 50 μm thick, where the thickness may be as great as 5 mm or greater.

As mentioned above, the second plate may be constructed from two or more parts, usually two parts, e.g., a base plate and a cover plate. Each part generally has a planar surface and the parts are sealed together so that the planar surfaces are opposed. The planar surface of the base plate usually includes one or more cavity structures and channels, while the planar surface of the cover plate may or may not include one or more cavity structures and channels.

The cover plate is usually placed over, and sealed to, the surface of the substrate of the base plate, although it may be a base plate enclosing the bottoms of the microstructures. The cover or under plate may be sealed to the substrate using any convenient means, including ultrasonic welding, adhesives, etc., and the base plate will come within the parameters for the cover plate. The cover may be a more or less rigid plate, or it may be a film, and the thickness of the cover may be different for materials having different mechanical properties. Usually the cover ranges in thickness from at least about 200 μm , more usually at least about 500 μm , to as thick as usually about 5 mm or thicker, more usually about 2 mm. The cover substrate may be fabricated from a single material or be fabricated as a composite material. In some instances the cover is of a plastic material, and it may be rigid or elastomeric.

In one approach the apparatus may have multiple layers that are sandwiched together similar to multiple layer electronic printed circuit boards. In this approach the apparatus may be made in a manner similar to the printed circuit boards. Each layer

contains cavities, channels and through-holes. When the various plates are assembled into an apparatus, the channels and through-holes in each layer can interconnect forming three dimensional fluid circuits. This approach allows significantly greater circuit complexity and circuit density than the single layer approach.

5 Another approach for the transfer of liquids from the first plate to the second plate of the present apparatus involves a plurality of active liquid transfer elements corresponding to each well of a multiwell plate. Upon activation of the active liquid transfer elements, an amount of liquid from the well of the well plate is actively transferred to a microfluidic network of the second plate through a corresponding
10 through-hole in the second plate. Exemplary of active liquid transfer elements include capillary droplet ejectors that are driven mechanically, electrically, pneumatically, thermally, and so forth, and capillary forces and surface tension, hydrodynamics, and the like.

The arrays of microfluidic units may be produced in a continuous manner, by
15 having at least two continuous films, where one film is embossed to introduce depressions that serve as the microstructures and a second film encloses the channel microstructures while providing ports for the reservoir microstructures. The films may be drawn from rollers simultaneously and after embossing one film, the other film may be adhered to the embossed film to provide a continuous film of a plurality of arrays.
20 Alternatively, slits may be introduced into one film, where the slits will serve as the microstructures and the slit film sandwiched between a support enclosing film and a cover film which has openings for the reservoirs for introducing liquids into the reservoirs.

Fig. 8 depicts two arrays of a film having a continuous series of arrays. The
25 figure illustrates a way in which the arrangement of the microchannel structures in the array can be made to match the geometry of, for example, a 96-well plate. Such an arrangement can facilitate automated transfer of samples or of test compounds from a standard plate to a continuous form microchannel device, providing for efficient transfer with reduced waste and minimal cross-contamination. The figure shows a short segment
30 of an elongate flexible film laminate containing a series of microchannel arrays. The elongate film laminate 842 extends lengthwise beyond the range of the drawing, as

indicated by broken lines extending from the edges 841 of the short segment. The short segment shown, which is limited by lines 843, includes two successive microchannel arrays of microstructures 844, 845. Each of the microchannel arrays 844, 845 containing 96 microchannel structures 830, is configured and arranged in an orthogonal 12 x 8 grid that conforms to the geometry of a conventional 96-well plate, with nominal 9mm centers.

Fig. 9 depicts a plan schematic view of individual microfluidic units in an 8 x 12 array with a footprint associated with a 96 well microtiter plate, whereby the samples from the microtiter plate may be directly transferred to a reservoir for analysis. The microfluidic unit array has 96 individual units 502, which are substantially identical. Each unit has a small cavity structure 504 that serves as the sample reservoir for receiving a sample and receiving an electrode during the processing of the sample. The sample reservoir 504 is connected to waste reservoir 506 by means of injection channel 508, which crosses a long channel 510 at intersection 512, where the long channel 510 can serve as a separation or other processing channel. The long channel 510 connects buffer reservoir 514 and waste reservoir 516. In operation, electrodes are introduced into each of the reservoirs, 504, 506, 514 and 516. By providing a voltage gradient in the injection channel 508, sample ions move in the channel 508 and past the intersection 512. When the intersection has the same composition as the sample reservoir 504, the field may be switched by means of electrodes in reservoirs 514 and 516, whereby the sample ions in the intersection is moved into the long channel 510 and may be further processed, such as separation into individual components.

The subject invention provides many benefits in providing arrays of microfluidic units in a single plate or substrate, where operations can be performed in parallel. This allows for simultaneous and parallel additions of samples, reagents and diluents to the individual devices under the same conditions, such as temperature, humidity and time. Also, the substrate is subjected to the same conditions during the operation, allowing for direct comparison of results. Where two or more of the same operations are carried out, one can obtain an accurate standard deviation, since the operations will be substantially under the same conditions. Also, by employing arrays of pipettors, that have the same organization as micro titer well plates, samples may be withdrawn from the micro titer

well plates and directly transferred to the subject devices, where the samples will have the same relationship as they had in the micro titer well plate. In this way, the samples may go through a plurality of operations, with the same spatial relationship in each of the operations, greatly reducing the possibility of confusion, cross-contamination and

5 increasing the ability to monitor individual samples. The subject devices simplify automation and computer monitoring of data by maintaining the orientation of samples through transfers and processing.

Each reference and patent application cited herein is incorporated by reference as if the

10 reference was set forth verbatim in the text of this specification.

Although the foregoing invention has been described in some detail by way of illustration and example for purposes of clarity of understanding, it will be readily apparent to those of ordinary skill in the art in light of the teachings of this invention that certain changes and modifications may be made thereto without departing from the spirit or scope of the

15 appended claims.

20

WHAT IS CLAIMED IS:

1. A microfluidic unit array comprising a plurality of microfluidic units in an organized array, each unit comprising a microfluidic network of reservoirs connected by interconnected channels of capillary dimensions including a primary flowpath and at least one secondary flowpath, each unit having a reservoir positioned in the array in the same format of a source array of at least one of samples and reagents.
2. A microfluidic unit array according to Claim 1, wherein the number of units is a multiple of 8 and each of the rows of units has at least 8 units.
3. A microfluidic unit array according to Claim 1, wherein said format is a 96 well micro titer well format.
4. A microfluidic unit array, wherein said microfluidic unit array comprises a substrate in which microfluidic units of said microfluidic unit array are formed, said microfluidic units comprising a microfluidic network of a plurality of reservoirs connected by interconnected channels including a primary flowpath and at least one secondary flowpath, and a film enclosing said interconnected channels, wherein reservoirs for receiving at least one of samples and reagents are positioned in the array in the same format of a source array, wherein said source array is a microtiter well plate having a number of wells equal to a multiple of 8.
5. A microfluidic unit array according to Claim 4, wherein said substrate is plastic.
6. A microfluidic unit array according to Claim 4, further comprising electrodes positioned for contact with liquid in said receiving reservoirs.
7. A microfluidic unit array according to Claim 6, in combination with a plate comprising wells for receiving liquid.

8. In a method for performing a plurality of simultaneous operations employing microfluidic devices, involving the transfer of liquids from an array of wells, the improvement which comprises:

5 employing a microfluidic unit array according to Claim 1.

10
15
20
25
30
35
40
45
50
55
60
65
70
75
80
85
90
95
100
105
110
115
120
125
130
135
140
145
150
155
160
165
170
175
180
185
190
195
200
205
210
215
220
225
230
235
240
245
250
255
260
265
270
275
280
285
290
295
300
305
310
315
320
325
330
335
340
345
350
355
360
365
370
375
380
385
390
395
400
405
410
415
420
425
430
435
440
445
450
455
460
465
470
475
480
485
490
495
500
505
510
515
520
525
530
535
540
545
550
555
560
565
570
575
580
585
590
595
600
605
610
615
620
625
630
635
640
645
650
655
660
665
670
675
680
685
690
695
700
705
710
715
720
725
730
735
740
745
750
755
760
765
770
775
780
785
790
795
800
805
810
815
820
825
830
835
840
845
850
855
860
865
870
875
880
885
890
895
900
905
910
915
920
925
930
935
940
945
950
955
960
965
970
975
980
985
990
995

MULTIPLE ARRAY MICROFLUIDIC DEVICE UNITS**ABSTRACT OF THE DISCLOSURE**

5 Microfluidic unit arrays and their use are provided for performing in parallel a plurality of operations. The units are arrayed in a format comparable to microtiter well formats, so that transfer by a dispenser having a plurality of dispensing units can be performed with the same footprint, the format of the source and microfluidic unit receiving reservoirs are substantially the same. Operations are carried out simultaneously
10 under comparable conditions, which permits more exact comparisons between the operations.

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199

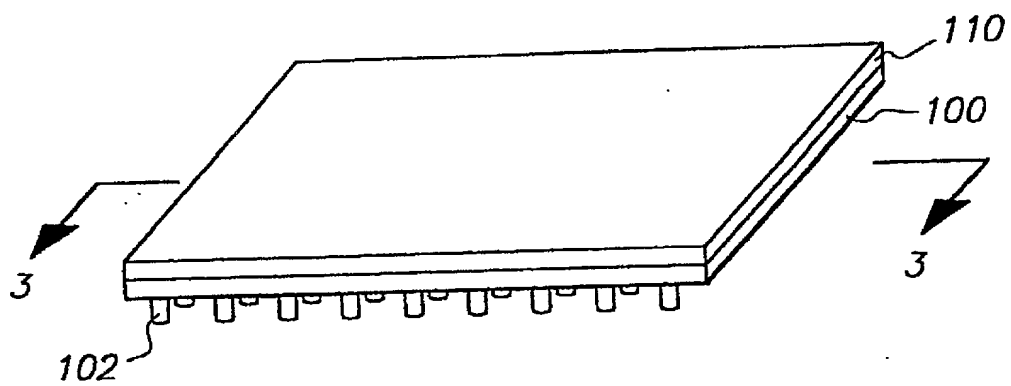
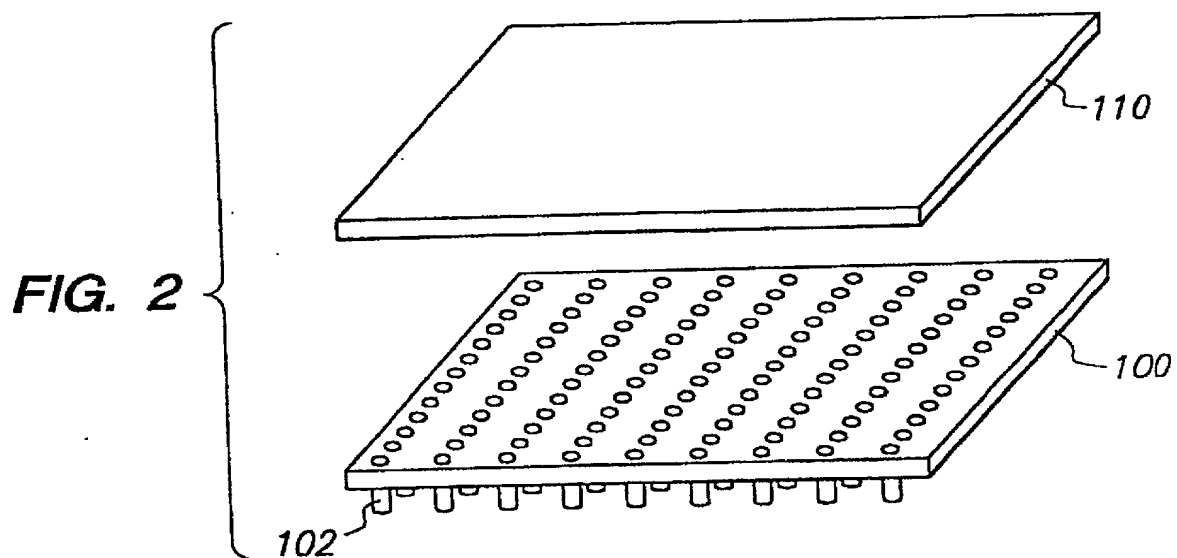


FIG. 1



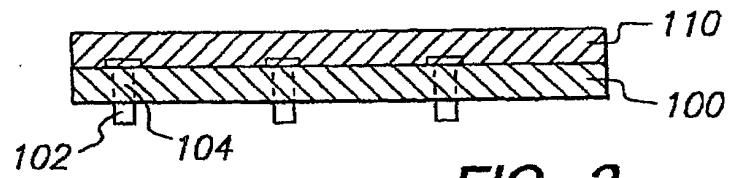


FIG. 3

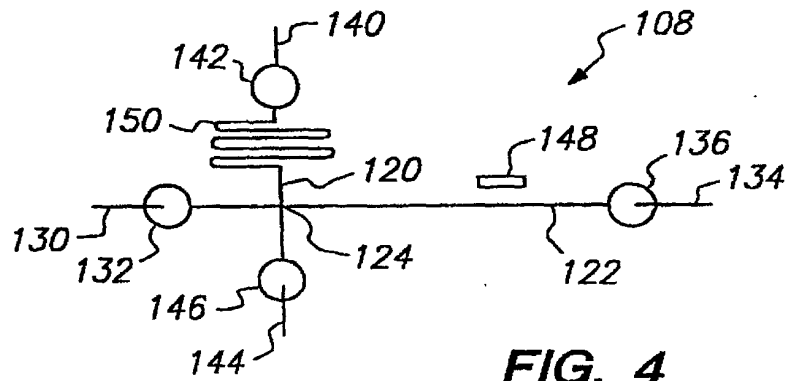


FIG. 4

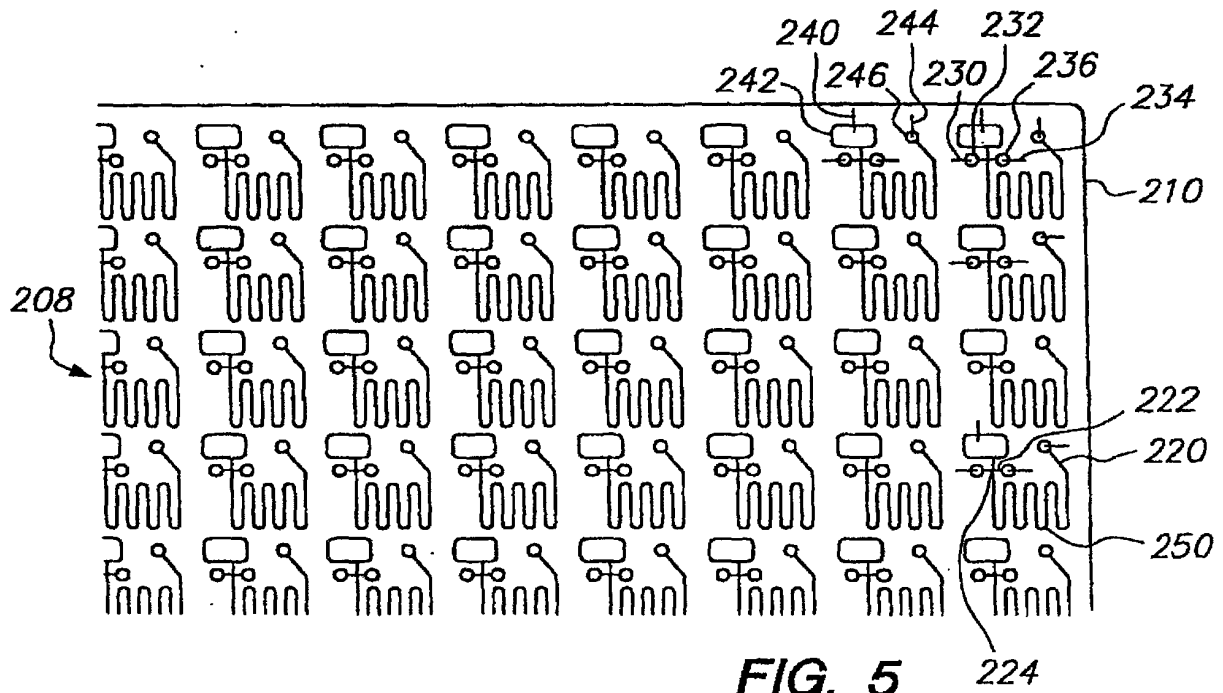


FIG. 5

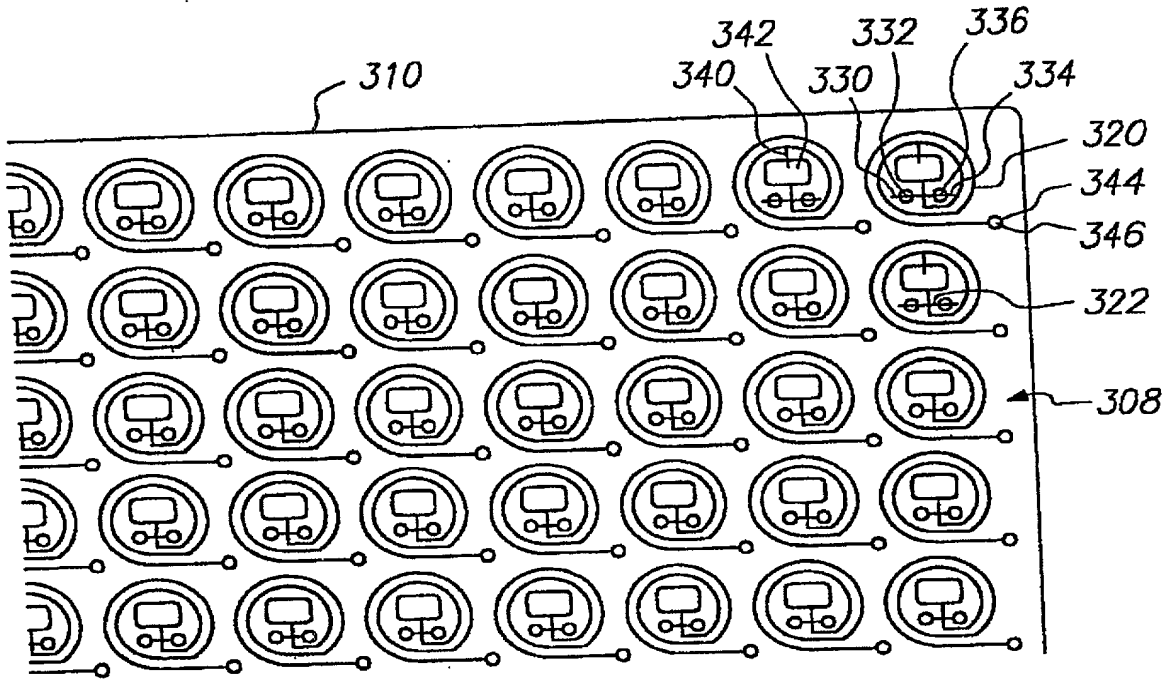


FIG. 6



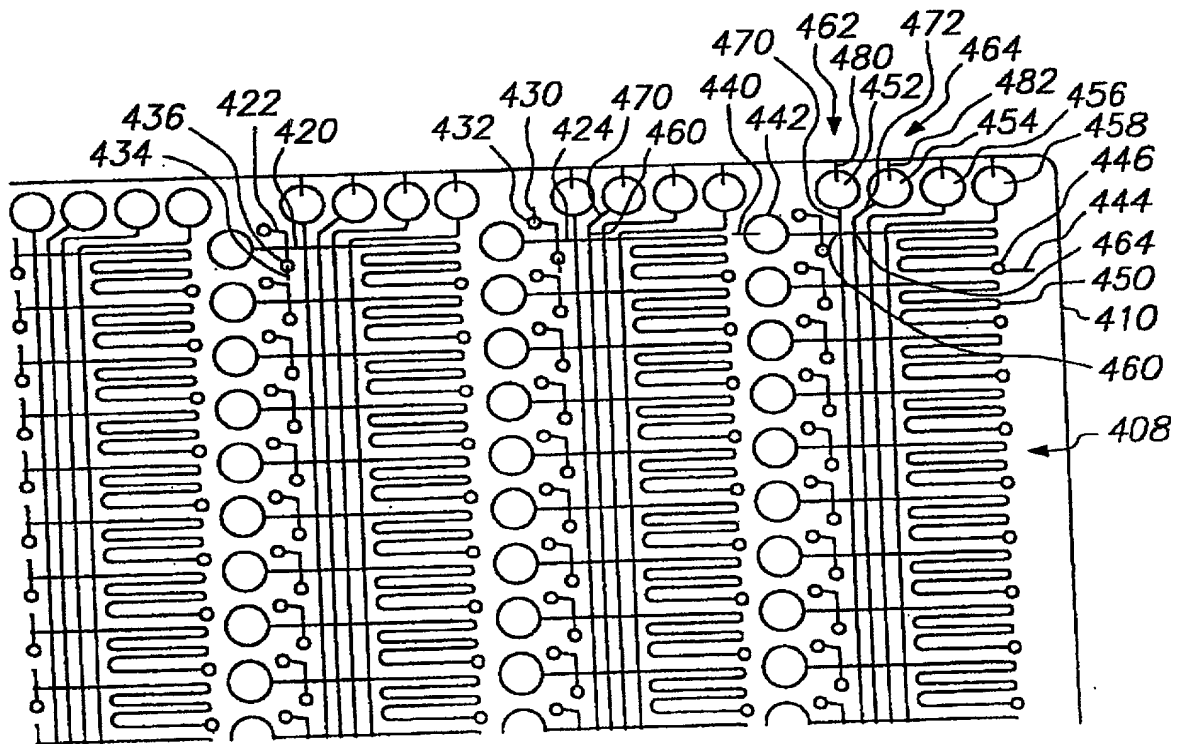


FIG. 7

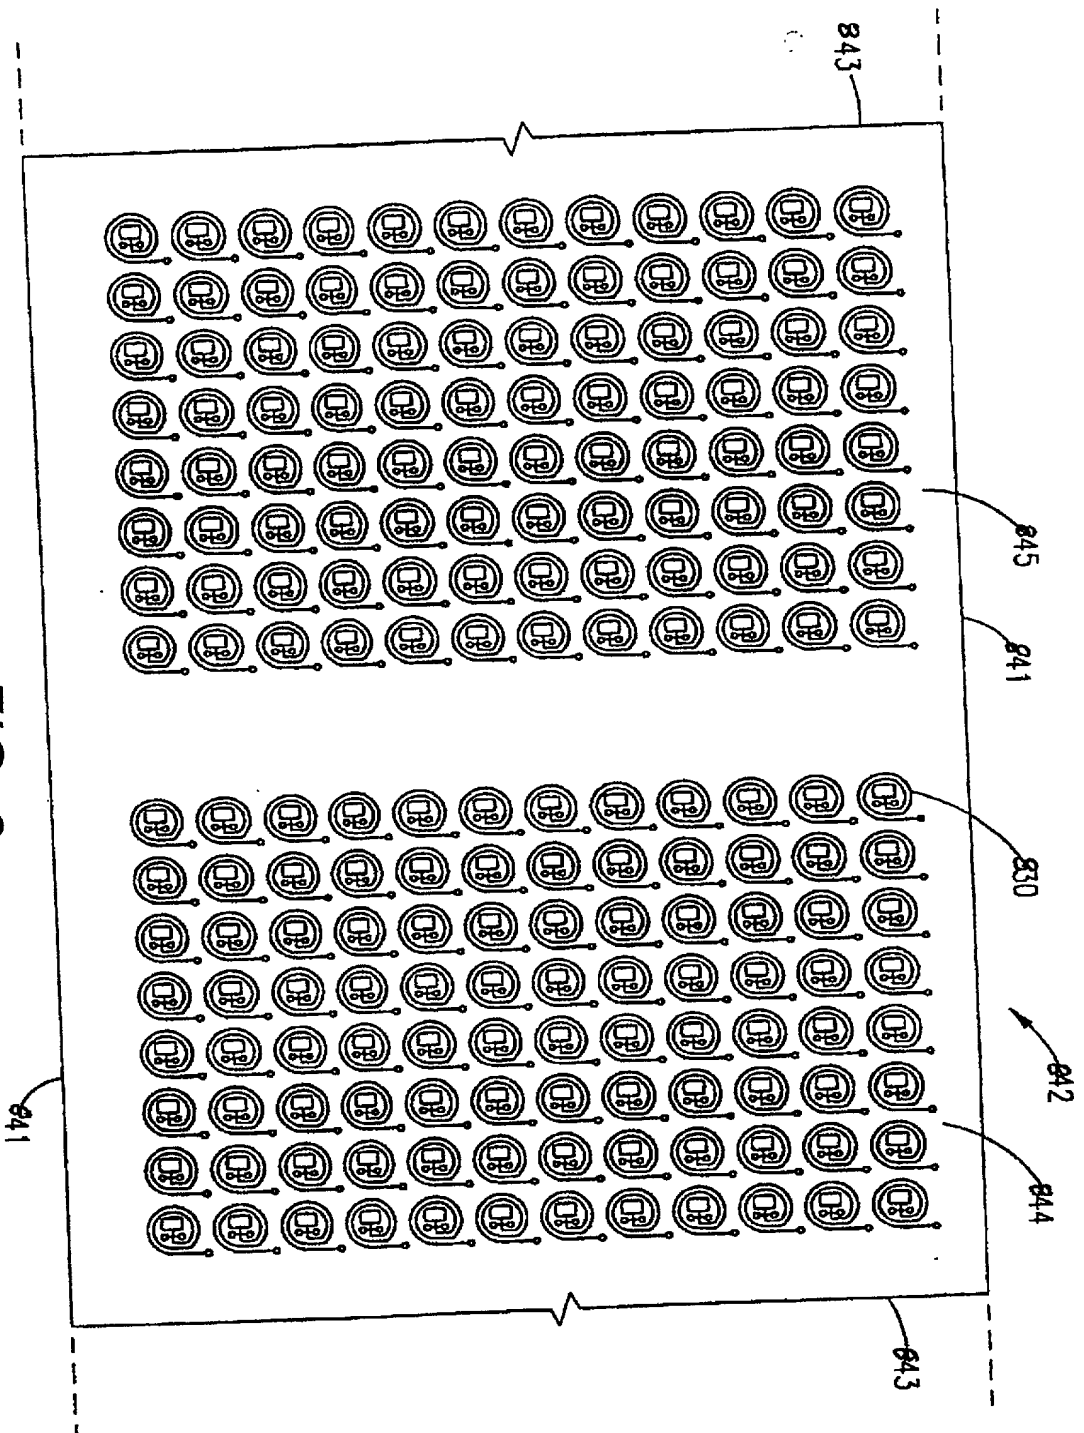

F/G. 8

FIG. 9

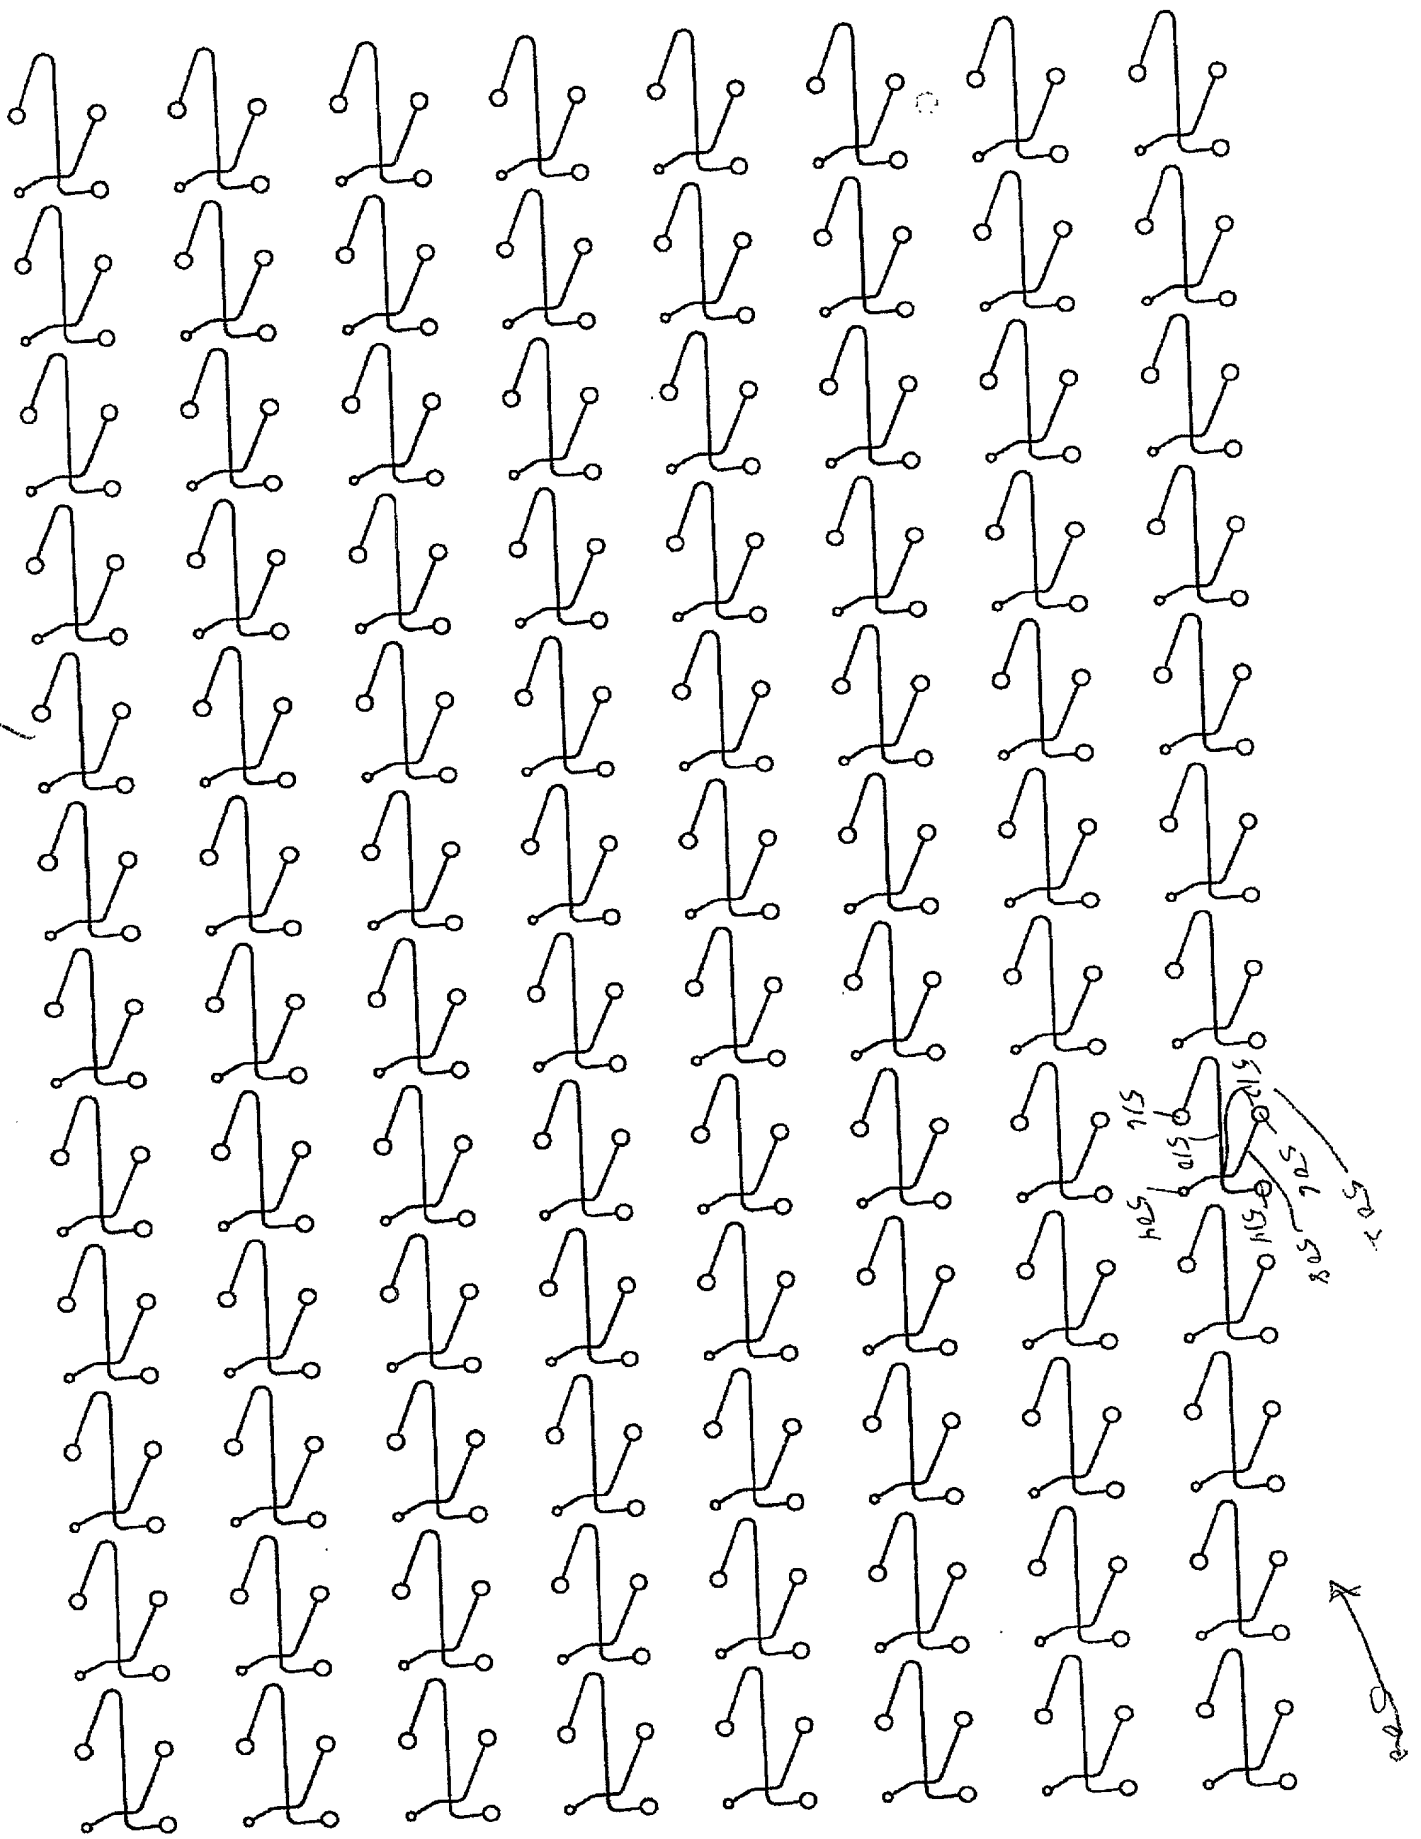

**COMBINED INVENTOR
DECLARATION AND POWER OF ATTORNEY**

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,
I believe I am the original, first and sole inventor (if only one name is listed below) or an
original, first and joint inventor (if plural names are listed below) of the subject matter which is
claimed and for which a patent is sought on the invention entitled:

Multiple Array Microfluidic Device Units

the specification of which

(check one) ☐ Is attached hereto.
☐ Was filed on _____ and has been assigned Serial Number _____.
☒ Was filed on April 25, 2000 as Attorney Docket No. ACBI.028.01US.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information known to me to be material to patentability of this application as defined in Title 37, Code of Federal Regulations, §1.56 and, if applicable, all such information under 37 CFR § 1.56 which became available between the national or PCT International filing date of the prior application and the filing date of this application.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			<u>Priority Claimed</u>	
(number)	(Country)	(Day/Month/Year Filed)	<input type="checkbox"/> Yes	<input type="checkbox"/> No
Prior Foreign Application(s)			<u>Priority Claimed</u>	
(number)	(Country)	(Day/Month/Year Filed)	<input type="checkbox"/> Yes	<input type="checkbox"/> No

Prior Foreign Application(s)

Priority Claimed

(number)	(Country)	(Day/Month/Year Filed)	<input type="checkbox"/> Yes	<input type="checkbox"/> No
----------	-----------	------------------------	------------------------------	-----------------------------

60/059,333 (Application Serial No.)		September 19, 1997 (Filing Date)		Pending (Status)
--	--	-------------------------------------	--	---------------------

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 USC §112 I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56, which became available between the filing date of the prior application and the national or PCT international filing date of this application:

09/153,814 (Application Serial No.)	September 15, 1998 (Filing Date)	Pending (Status)
--	-------------------------------------	---------------------

(Application Serial No.)	(Filing Date)	(Status)
--------------------------	---------------	----------

(Application Serial No.) * designating the U.S.	(Filing Date)	(Status)
--	---------------	----------

I hereby appoint:

BARBARA RAE-VENTER, Ph.D., Reg. No. 32,750
BERTRAM I. ROWLAND, Ph.D., Reg. No. 20,015
JENNIFER WAHLSTEN, Ph.D., Reg. No. 46,226

as my attorneys or agents with full power of substitution and revocation to prosecute my above-identified application for Letters Patent and to transact all business in the Patent Office connected therewith.

Direct all telephone calls to Barbara Rae-Venter, Ph.D. at (650) 328-4400.

Address all correspondence to:

Bertram I. Rowland, Ph.D.
Rae-Venter Law Group, P.C.
P. O. Box 60039
Palo Alto, California 94306-0039

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Title 18, United States Code, §1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor:

Inventor's signature: Torleif Ove Bjornson

Date: _____

Residence: 7030 Daniel Court, Gilroy, CA 95020, U.S.

Citizenship: Sweden

Post Office Address: same as above

Full name of second joint inventor, if any:

Inventor's signature: _____

Date: _____

Residence: _____

Citizenship: _____

Post Office Address: _____

Full name of third joint inventor, if any:

Inventor's signature: _____

Date: _____

Residence: _____

Citizenship: _____

Post Office Address: _____

Full name of fourth joint inventor, if any:

Inventor's signature: _____

Date: _____

Residence: _____

Citizenship: _____

Post Office Address: _____